



线条灯系列
LED Line Light Series

U201X
线形灯系列
LINE LIGHT SERIES

产品特点
Product Features
带线槽，中间出线,单端供电可联15M,支持串行/并行控制方式
Middle outgoing line, single end power supply can be connected in series for 15 meters Support serial/parallel control mode
透镜+铝材面罩，防护更好，更高可靠性
Higher efficiency,better heat dissipation design,more reliabile
全自动化生产工艺，急速交货
Fully automated production technology,fast delivery
采用进口灌封胶，散热及防水性好
We use in potting glue,heat and water proofing property is good
可通过CCC,UL,ETL,CE,ROHS等多国认证
CCC,UL,ETL,CE,ROHS approved
户外防雷及静电（ESD）专用防护设计
Outdoor lighting protection and electrostatic ESD protection design




可提供型号
Order Info

规格型号 Item No.	U201A	U201D	U201G
光源 Light Source	48pcs SMD5050LEDS	48pcs SMD5050LEDS	48pcs SMD5050LEDS
颜色 Color	W/NW/R/G/B/Y	RGB	RGBW
控制协议 Control Protocol	单色常亮	并联DMX	并联DMX
灰度级别 Gray Scale	/	256	256
工作电压 Working Voltage	DC24V	DC24V	DC24V
功率 Wattage	12W/M	12W/M	14.4W/M
光强 Light Intenslty	150cd	150cd	200cd
灯珠品牌 LED Brand	晶元/科锐/欧司朗 Epistar/CREE/Osram	晶元/科锐/欧司朗 Epistar/CREE/Osram	晶元/科锐/欧司朗 Epistar/CREE/Osram
材质 Material	铝壳+橡胶线 Aluminum+Rubber wire	铝壳+橡胶线 Aluminum+Rubber wire	铝壳+橡胶线 Aluminum+Rubber wire
像素 Pixel	0	8	8
故障反馈 Fault Feedback	否 No	否 No	否 No

技术参数
Specifications

色彩 Color Range	RGB全彩16777216色/RGB full color	光源 Light Source	48 pcs SMD LEDS
材质 Material	高强度铝合金/PC灯罩 High strength aluminum alloy /PC lampshade		
重量 Weight	700g	工作温度 Working Temperature	-30℃ to 50℃
储存温度 Storage Temperature	-40℃ to 70℃	防护等级 Protection Rating	IP66
工作电压 Working Voltage	DC24V	功率 Power Consumption	12W
光强 Light Intensity	混白光：150cd;(参数为全彩光源) Mixed White:150cd (data refers to full color light source)		
光束角 Beam Angle	120°	寿命 Source Life	50,000小时/50,000hours

物理尺寸
Physical Dimensions

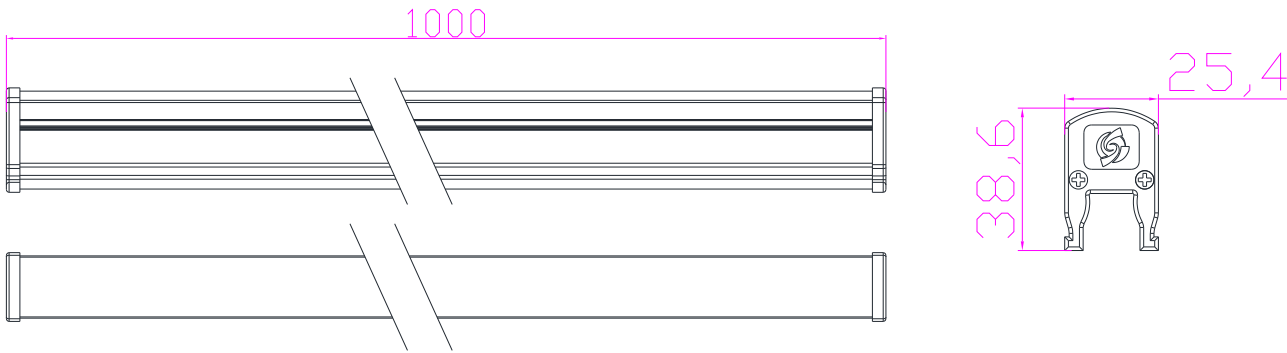

应用实例
Application Cases

Exhibition Centre Anhui



U204X
线形灯系列
LINE LIGHT SERIES

产品特点
Product Features
带线槽，中间出线,单端供电可联15M,支持串行/并行控制方式
Middle outgoing line, single end power supply can be connected in series for 15 meters Support serial/parallel control mode
透镜+铝材面罩，防护更好，更高可靠性
Higher efficiency,better heat dissipation design,more reliabie
全自动化生产工艺，急速交货
Fully automated production technology,fast delivery
采用进口灌封胶，散热及防水性好
We use in potting glue,heat and water proofing property is good
可通过CCC,UL,ETL,CE,ROHS等多国认证
CCC,UL,ETL,CE,ROHS approved
户外防雷及静电（ESD）专用防护设计
Outdoor lighting protection and electrostatic ESD protection design




可提供型号
Order Info

规格型号 Item No.	U204A	U204D	U204G
光源 Light Source	48pcs SMD5050LEDS	48pcs SMD5050LEDS	48pcs SMD5050LEDS
颜色 Color	W/NW/R/G/B/Y	RGB	RGBW
控制协议 Control Protocol	单色常亮	并联DMX	并联DMX
灰度级别 Gray Scale	/	256	256
工作电压 Working Voltage	DC24V	DC24V	DC24V
功率 Wattage	12W/M	12W/M	14.4W/M
光强 Light Intenslty	150cd	150cd	200cd
灯珠品牌 LED Brand	晶元/科锐/欧司朗 Epistar/CREE/Osram	晶元/科锐/欧司朗 Epistar/CREE/Osram	晶元/科锐/欧司朗 Epistar/CREE/Osram
材质 Material	铝壳+橡胶线 Aluminum+Rubber wire	铝壳+橡胶线 Aluminum+Rubber wire	铝壳+橡胶线 Aluminum+Rubber wire
像素 Pixel	0	8	8
故障反馈 Fault Feedback	否 No	否 No	否 No

技术参数
Specifications


色彩 Color Range	RGB全彩16777216色/RGB full color	光源 Light Source	48 pcs SMD LEDS
材质 Material	高强度铝合金/PC灯罩 High strength aluminum alloy /PC lampshade		
重量 Weight	700g	工作温度 Working Temperature	-30℃ to 50℃
储存温度 Storage Temperature	-40℃ to 70℃	防护等级 Protection Rating	IP66
工作电压 Working Voltage	DC24V	功率 Power Consumption	12W
光强 Light Intensity	混白光：150cd;(参数为全彩光源) Mixed White:150cd (data refers to full color light source)		
光束角 Beam Angle	120°	寿命 Source Life	50,000小时/50,000hours

物理尺寸
Physical Dimensions

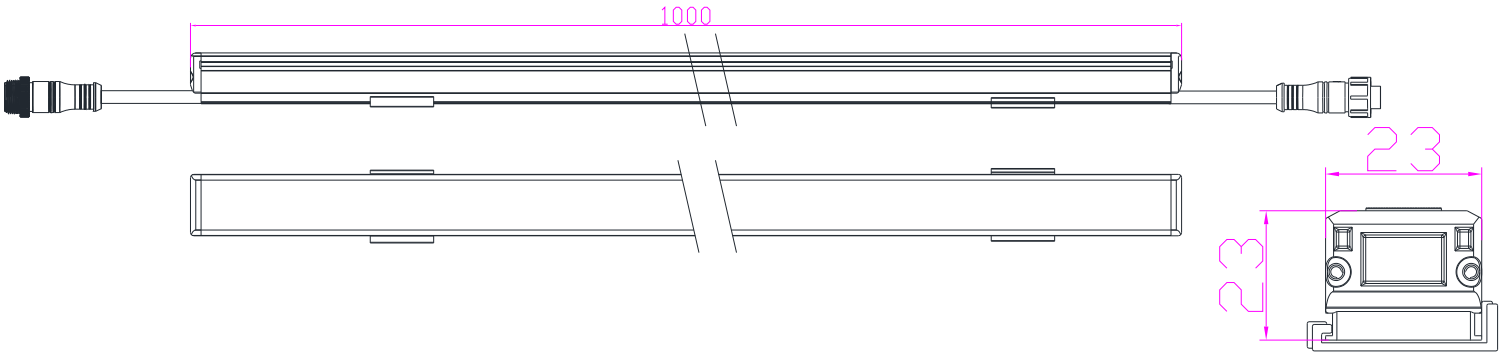

应用实例
Application Cases

Shopping Mall Shantou

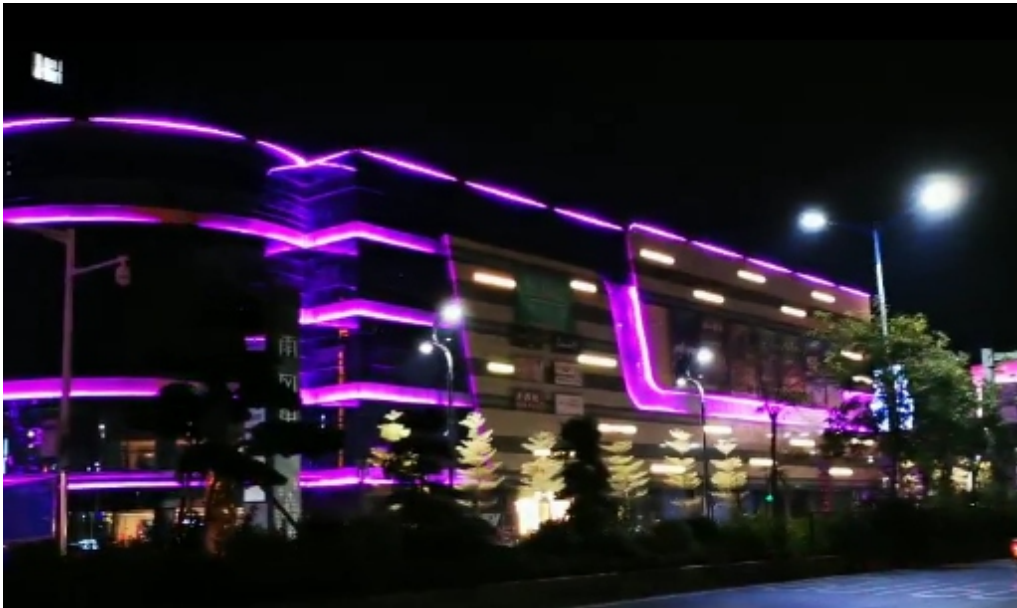

U205X

线形灯系列

LINE LIGHT SERIES

产品特点
Product Features
中间出线,单端供电可联15M,支持串行/并行控制方式
Middle outgoing line, single end power supply can be connected in series for 15 meters Support serial/parallel control mode
更高光效,更好散热设计,更高可靠性
Higher efficiency,better heat dissipation design,more reliabie
全自动化生产工艺,急速交货
Fully automated production technology,fast delivery
采用进口灌封胶,散热及防水性好
We use in potting glue,heat and water proofing property is good
可通过CCC,UL,ETL,CE,ROHS等多国认证
CCC,UL,ETL,CE,ROHS approved
户外防雷及静电(ESD)专用防护设计
Outdoor lighting protection and electrostatic ESD protection design




技术参数

Specifications

色彩 Color Range	RGB全彩16777216色/RGB full color	光源 Light Source	48 pcs SMD LEDs
材质 Material	高强度铝合金/PC灯罩 High strength aluminum alloy /PC lampshade		
重量 Weight	540g	工作温度 Working Temperature	-30℃ to 50℃
储存温度 Storage Temperature	-40℃ to 70℃	防护等级 Protection Rating	IP66
工作电压 Working Voltage	DC24V	功率 Power Consumption	12W
光强 Light Intensity	混白光：150cd;(参数为全彩光源) Mixed White:150cd (data refers to full color light source)		
光束角 Beam Angle	120°	寿命 Source Life	50,000小时/50,000hours

物理尺寸

Physical Dimensions

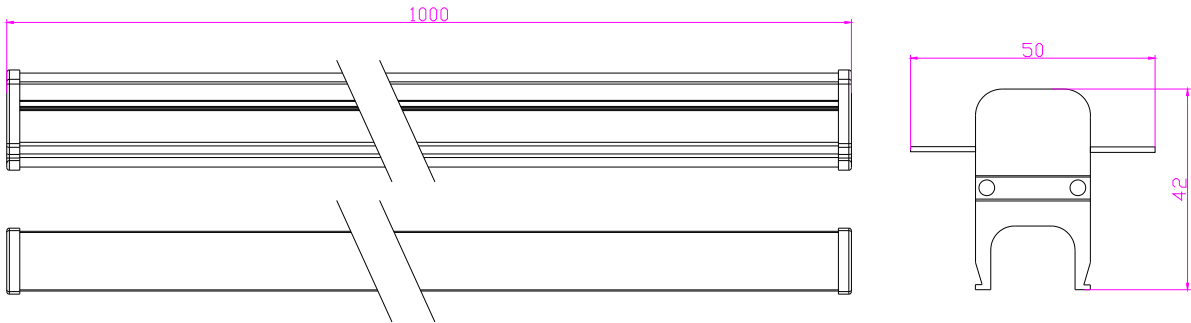

应用实例

Application Cases

Meiyuan Shanxi Province



U301X
线形灯系列
LINE LIGHT SERIES

产品特点
Product Features
中间出线,单端供电可联15M,支持串行/并行控制方式
Middle outgoing line, single end power supply can be connected in series for 15 meters Support serial/parallel control mode
铝合金灯体配合低热阻路径散热设计, 面罩采高透光亚克力材质, 见光不见灯
Aluminum alloy lamp body with low thermal resistance path heat dissipation design, high light transmission acrylic lampshade, see light but not see the lamp
全自动化生产工艺, 急速交货
Fully automated production technology, fast delivery
采用进口灌封胶, 散热及防水性好
We use in potting glue, heat and water proofing property is good
可通过CCC,UL,ETL,CE,ROHS等多国认证
CCC,UL,ETL,CE,ROHS approved
户外防雷及静电(ESD)专用防护设计
Outdoor lighting protection and electrostatic ESD protection design



可提供型号
Order Info


Nanjing Science Park

规格型号 Item No.	U301A	U301D	U301G
光源 Light Source	48pcs SMD5050LEDS	48pcs SMD5050LEDS	48pcs SMD5050LEDS
颜色 Color	W/NW/R/G/B/Y	RGB	RGBW
控制协议 Control Protocol	单色常亮	并联DMX	并联DMX
灰度级别 Gray Scale	/	256	256
工作电压 Working Voltage	DC24V	DC24V	DC24V
功率 Wattage	12W/M	12W/M	14.4W/M
光强 Light Intenslty	150cd	150cd	200cd
灯珠品牌 LED Brand	晶元/科锐/欧司朗 Epistar/CREE/Osram	晶元/科锐/欧司朗 Epistar/CREE/Osram	晶元/科锐/欧司朗 Epistar/CREE/Osram
材质 Material	铝壳+橡胶线 Aluminum+Rubber wire	铝壳+橡胶线 Aluminum+Rubber wire	铝壳+橡胶线 Aluminum+Rubber wire
像素 Pixel	0	8	8
故障反馈 Fault Feedback	否 No	否 No	否 No

技术参数
Specifications

色彩 Color Range	RGB全彩16777216色/RGB full color	光源 Light Source	48 pcs SMD LEDS
材质 Material	高强度铝合金/PC灯罩 High strength aluminum alloy /PC lampshade		
重量 Weight	480g	工作温度 Working Temperature	-30℃ to 50℃
储存温度 Storage Temperature	-40℃ to 70℃	防护等级 Protection Rating	IP66
工作电压 Working Voltage	DC24V	功率 Power Consumption	12W
光强 Light Intensity	混白光：10cd;(参数为全彩光源) Mixed White:150cd (data refers to full color light source)		
光束角 Beam Angle	120°	寿命 Source Life	50,000小时/50,000hours

物理尺寸
Physical Dimensions

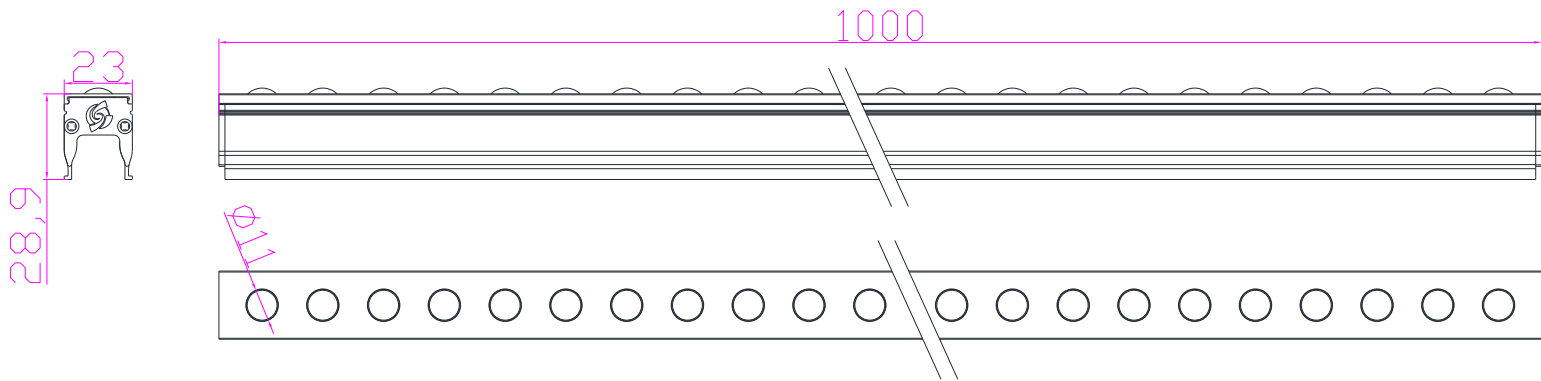

应用实例
Application Cases

Nanjing Science Park



U302X
线形灯系列
LINE LIGHT SERIES

产品特点
Product Features
中间出线,单端供电可联15M,支持串行/并行控制方式
Middle outgoing line, single end power supply can be connected in series for 15 meters Support serial/parallel control mode
更高光效,更好散热设计,更高可靠性
Higher efficiency,better heat dissipation design,more reliable
全自动化生产工艺,急速交货
Fully automated production technology,fast delivery
采用进口灌封胶,散热及防水性好
We use in potting glue,heat and water proofing property is good
可通过CCC,UL,ETL,CE,ROHS等多国认证
CCC,UL,ETL,CE,ROHS approved
户外防雷及静电(ESD)专用防护设计
Outdoor lighting protection and electrostatic ESD protection design




可提供型号
Order Info

规格型号 Item No.	U302A	U302D	U302G
光源 Light Source	48pcs SMD5050LEDS	48pcs SMD5050LEDS	48pcs SMD5050LEDS
颜色 Color	W/NW/R/G/B/Y	RGB	RGBW
控制协议 Control Protocol	单色常亮	并联DMX	并联DMX
灰度级别 Gray Scale	/	256	256
工作电压 Working Voltage	DC24V	DC24V	DC24V
功率 Wattage	12W/M	12W/M	14.4W/M
光强 Light Intenslty	150cd	150cd	200cd
灯珠品牌 LED Brand	晶元/科锐/欧司朗 Epistar/CREE/Osram	晶元/科锐/欧司朗 Epistar/CREE/Osram	晶元/科锐/欧司朗 Epistar/CREE/Osram
材质 Material	铝壳+橡胶线 Aluminum+Rubber wire	铝壳+橡胶线 Aluminum+Rubber wire	铝壳+橡胶线 Aluminum+Rubber wire
像素 Pixel	0	8	8
故障反馈 Fault Feedback	否 No	否 No	否 No

技术参数
Specifications

色彩 Color Range	RGB全彩16777216色/RGB full color	光源 Light Source	48 pcs SMD LEDS
材质 Material	高强度铝合金/PC灯罩 High strength aluminum alloy /PC lampshade		
重量 Weight	540g	工作温度 Working Temperature	-30℃ to 50℃
储存温度 Storage Temperature	-40℃ to 70℃	防护等级 Protection Rating	IP66
工作电压 Working Voltage	DC24V	功率 Power Consumption	12W
光强 Light Intensity	混白光：150cd;(参数为全彩光源) Mixed White:150cd (data refers to full color light source)		
光束角 Beam Angle	120°	寿命 Source Life	50,000小时/50,000hours

物理尺寸
Physical Dimensions

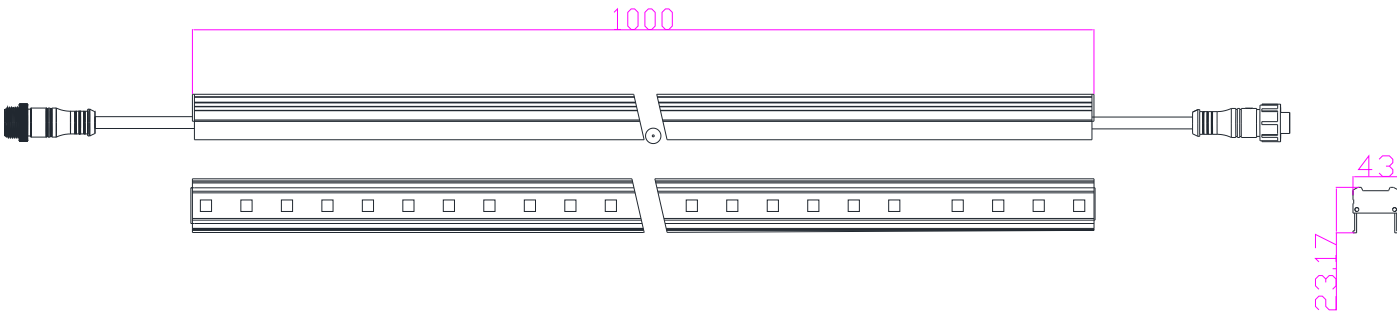


应用实例
Application Cases

Abu-dhabi Gate IBIS



U304X
线形灯系列
LINE LIGHT SERIES

产品特点
Product Features
带线槽，中间出线,单端供电可联15M,支持串行/并行控制方式
Middle outgoing line, single end power supply can be connected in series for 15 meters Support serial/parallel control mode
透镜+铝材面罩，防护更好，更高可靠性
Higher efficiency,better heat dissipation design,more reliabile
全自动化生产工艺，急速交货
Fully automated production technology,fast delivery
采用进口灌封胶，散热及防水性好
We use in potting glue,heat and water proofing property is good
可通过CCC,UL,ETL,CE,ROHS等多国认证
CCC,UL,ETL,CE,ROHS approved
户外防雷及静电（ESD）专用防护设计
Outdoor lighting protection and electrostatic ESD protection design

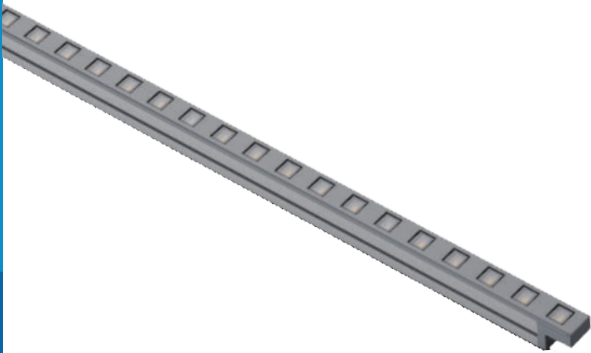


可提供型号
Order Info

规格型号 Item No.	U304A	U304D	U304G
光源 Light Source	48pcs SMD5050LEDS	48pcs SMD5050LEDS	48pcs SMD5050LEDS
颜色 Color	W/NW/R/G/B/Y	RGB	RGBW
控制协议 Control Protocol	单色常亮	并联DMX	并联DMX
灰度级别 Gray Scale	/	256	256
工作电压 Working Voltage	DC24V	DC24V	DC24V
功率 Wattage	12W/M	12W/M	14.4W/M
光强 Light Intenslty	150cd	150cd	200cd
灯珠品牌 LED Brand	晶元/科锐/欧司朗 Epistar/CREE/Osram	晶元/科锐/欧司朗 Epistar/CREE/Osram	晶元/科锐/欧司朗 Epistar/CREE/Osram
材质 Material	铝壳+橡胶线 Aluminum+Rubber wire	铝壳+橡胶线 Aluminum+Rubber wire	铝壳+橡胶线 Aluminum+Rubber wire
像素 Pixel	0	8	8
故障反馈 Fault Feedback	否 No	否 No	否 No

技术参数
Specifications

色彩 Color Range	RGB全彩16777216色/RGB full color	光源 Light Source	48 pcs SMD LEDS
材质 Material	高强度铝合金/PC灯罩 High strength aluminum alloy /PC lampshade		
重量 Weight	700g	工作温度 Working Temperature	-30℃ to 50℃
储存温度 Storage Temperature	-40℃ to 70℃	防护等级 Protection Rating	IP66
工作电压 Working Voltage	DC24V	功率 Power Consumption	12W
光强 Light Intensity	混白光：150cd;(参数为全彩光源) Mixed White:150cd (data refers to full color light source)		
光束角 Beam Angle	120°	寿命 Source Life	50,000小时/50,000hours

物理尺寸
Physical Dimensions

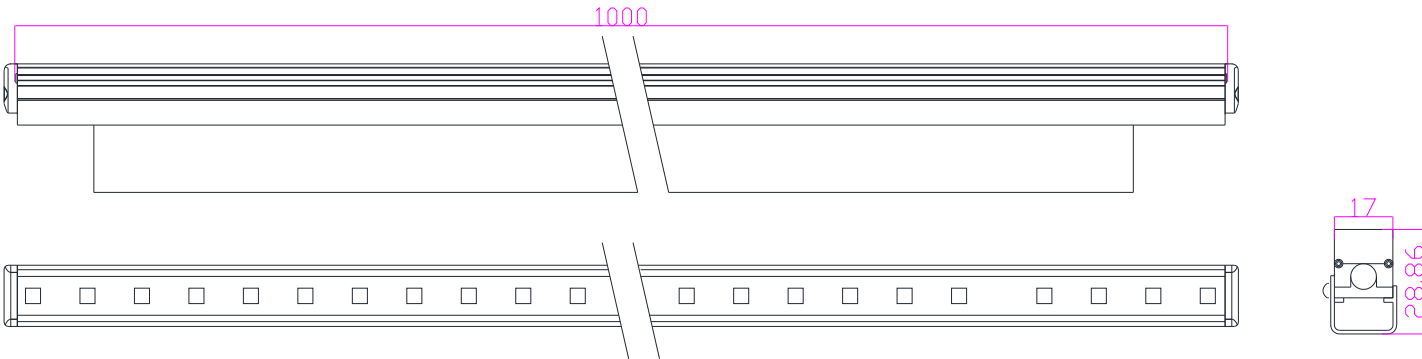

应用实例
Application Cases

Wan City Nanning



U402X
线形灯系列
LINE LIGHT SERIES

产品特点
Product Features
中间出线,单端供电可联15M,支持串行/并行控制方式
Middle outgoing line, single end power supply can be connected in series for 15 meters Support serial/parallel control mode
亚克力面罩, 防眩光, 光线更柔和, 加厚更好散热设计, 更高可靠性
Higher efficiency,better heat dissipation design,more reliable
全自动化生产工艺, 急速交货
Fully automated production technology,fast delivery
采用进口灌封胶, 散热及防水性好
We use in potting glue,heat and water proofing property is good
可通过CCC,UL,ETL,CE,ROHS等多国认证
CCC,UL,ETL,CE,ROHS approved
户外防雷及静电 (ESD) 专用防护设计
Outdoor lighting protection and electrostatic ESD protection design




可提供型号
Order Info

规格型号 Item No.	U402A	U402D	U402G
光源 Light Source	48pcs SMD5050LEDs	48pcs SMD5050LEDs	48pcs SMD5050LEDs
颜色 Color	W/NW/R/G/B/Y	RGB	RGBW
控制协议 Control Protocol	单色常亮	并联DMX	并联DMX
灰度级别 Gray Scale	/	256	256
工作电压 Working Voltage	DC24V	DC24V	DC24V
功率 Wattage	12W/M	12W/M	14.4W/M
光强 Light Intenslty	150cd	150cd	200cd
灯珠品牌 LED Brand	晶元/科锐/欧司朗 Epistar/CREE/Osram	晶元/科锐/欧司朗 Epistar/CREE/Osram	晶元/科锐/欧司朗 Epistar/CREE/Osram
材质 Material	铝壳+橡胶线 Aluminum+Rubber wire	铝壳+橡胶线 Aluminum+Rubber wire	铝壳+橡胶线 Aluminum+Rubber wire
像素 Pixel	0	8	8
故障反馈 Fault Feedback	否 No	否 No	否 No

技术参数
Specifications

色彩 Color Range	RGB全彩16777216色/RGB full color	光源 Light Source	48 pcs SMD LEDs
材质 Material	高强度铝合金/PC灯罩 High strength aluminum alloy /PC lampshade		
重量 Weight	700g	工作温度 Working Temperature	-30℃ to 50℃
储存温度 Storage Temperature	-40℃ to 70℃	防护等级 Protection Rating	IP66
工作电压 Working Voltage	DC24V	功率 Power Consumption	12W
光强 Light Intensity	混白光：150cd;(参数为全彩光源) Mixed White:150cd (data refers to full color light source)		
光束角 Beam Angle	120°	寿命 Source Life	50,000小时/50,000hours

物理尺寸
Physical Dimensions

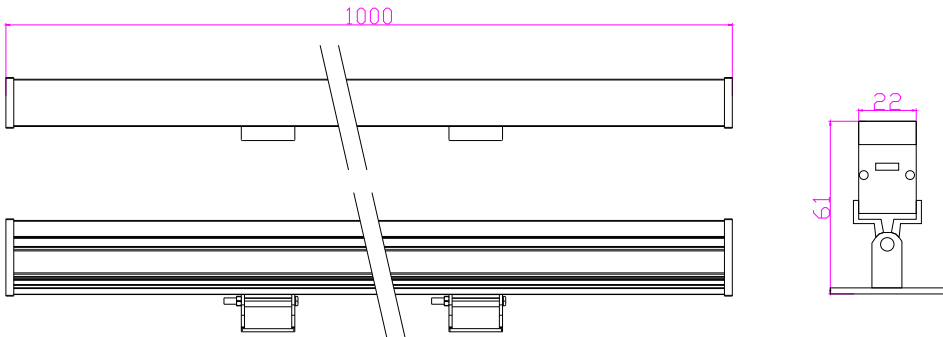

应用实例
Application Cases

City Station Haikou



U403X

线性地埋灯系列

LINE LIGHT SERIES

产品特点
Product Features
中间出线,单端供电可联15M,支持串行/并行控制方式
Middle outgoing line, single end power supply can be connected in series for 15 meters Support serial/parallel control mode
亚克力面罩, 防眩光, 光线更柔和, 加厚更好散热设计, 更高可靠性
Higher efficiency,better heat dissipation design,more reliabile
全自动化生产工艺, 急速交货
Fully automated production technology,fast delivery
采用进口灌封胶, 散热及防水性好
We use in potting glue,heat and water proofing property is good
可通过CCC,UL,ETL,CE,ROHS等多国认证
CCC,UL,ETL,CE,ROHS approved
户外防雷及静电 (ESD) 专用防护设计
Outdoor lighting protection and electrostatic ESD protection design



可提供型号

Order Info

规格型号 Item No.	U402A	U402D	U402G
光源 Light Source	48pcs SMD5050LEDS	48pcs SMD5050LEDS	48pcs SMD5050LEDS
颜色 Color	W/NW/R/G/B/Y	RGB	RGBW
控制协议 Control Protocol	单色常亮	并联DMX	并联DMX
灰度级别 Gray Scale	/	256	256
工作电压 Working Voltage	DC24V	DC24V	DC24V
功率 Wattage	12W/M	12W/M	14.4W/M
光强 Light Intenslty	150cd	150cd	200cd
灯珠品牌 LED Brand	晶元/科锐/欧司朗 Epistar/CREE/Osram	晶元/科锐/欧司朗 Epistar/CREE/Osram	晶元/科锐/欧司朗 Epistar/CREE/Osram
材质 Material	铝壳+橡胶线 Aluminum+Rubber wire	铝壳+橡胶线 Aluminum+Rubber wire	铝壳+橡胶线 Aluminum+Rubber wire
像素 Pixel	0	8	8
故障反馈 Fault Feedback	否 No	否 No	否 No


技术参数

Specifications

色彩 Color Range	RGB全彩16777216色/RGB full color	光源 Light Source	48 pcs SMD LEDS
材质 Material	高强度铝合金/PC灯罩 High strength aluminum alloy /PC lampshade		
重量 Weight	700g	工作温度 Working Temperature	-30℃ to 50℃
储存温度 Storage Temperature	-40℃ to 70℃	防护等级 Protection Rating	IP66
工作电压 Working Voltage	DC24V	功率 Power Consumption	12W
光强 Light Intensity	混白光：150cd;(参数为全彩光源) Mixed White:150cd (data refers to full color light source)		
光束角 Beam Angle	120°	寿命 Source Life	50,000小时/50,000hours

物理尺寸

Physical Dimensions

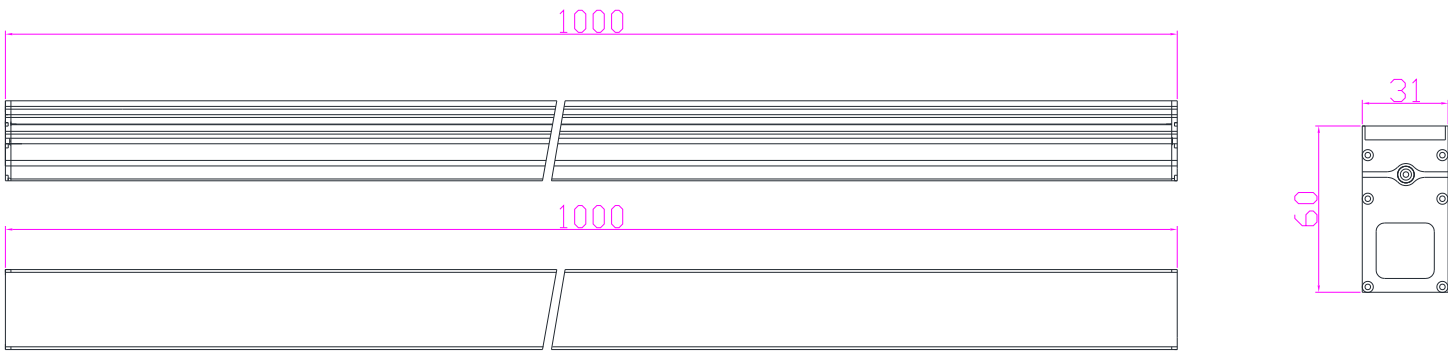

应用实例

Application Cases

Underground Linear Light

